

WRLTWAS WASTE for LINEAR SHOWER BASE

Aqua4MA
WETROOM
SYSTEMS

KUDOS


Please read these instructions throughout before installing as incorrect fitting will invalidate the guarantee

These installation instructions must be used in conjunction with the Aqua4MA Linear Shower Base Instructions

If you are unsure about these instructions please contact Kudos Shower Products:

Customer Service Helpline: 01539 564040

EXPLODED VIEW

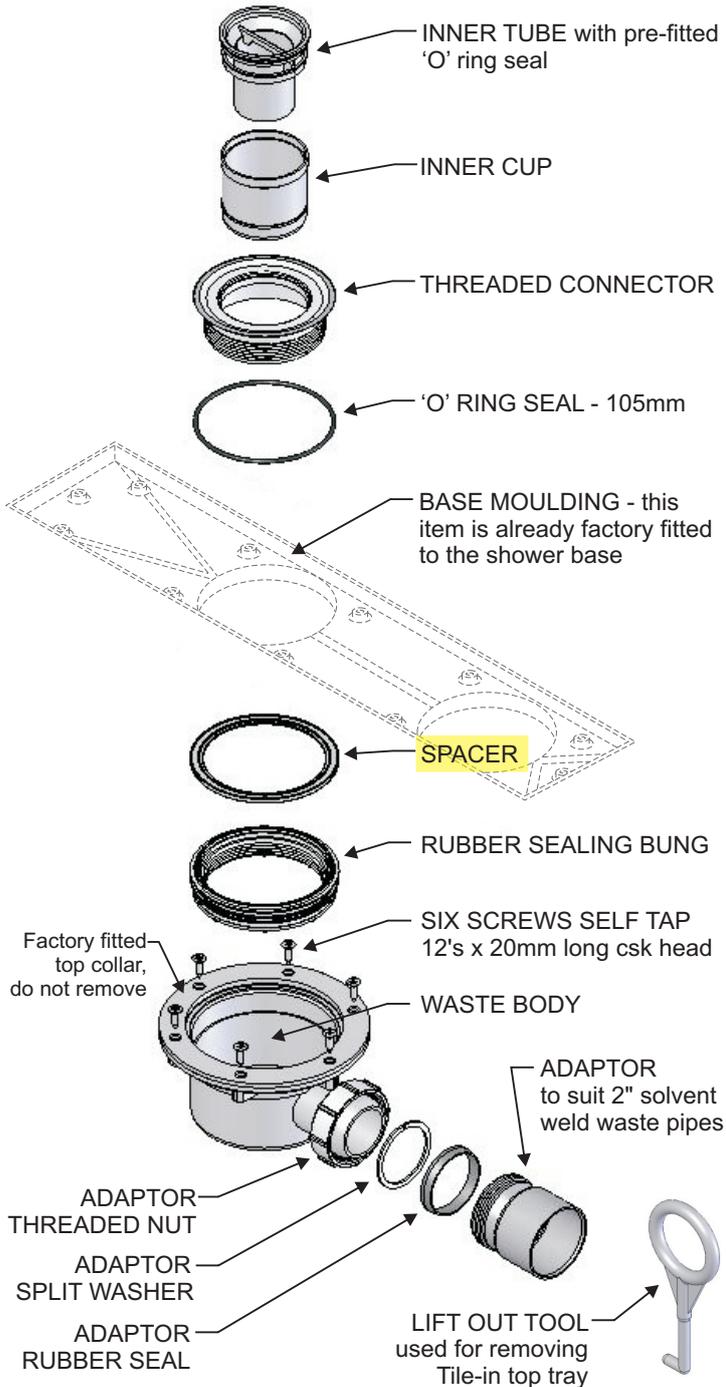


CLEANING

Clean on a regular basis to prevent dirt / debris build up. Use the Lift out tool supplied to remove Tile-in top tray, remove the Inner Tube & Inner Cup to clean and also clean inside of the Waste Body using warm soapy water only.


1 Fit 2" solvent weld waste pipe to the waste **Adaptor** using solvent weld - *not supplied*.
Do not use Solvent Weld for this or any other pipe joints.

2 The **Trap Body** is secured to the Metal Tray using the six no. 12's x 20mm long screws provided with the waste.


3 Insert **'O' Ring Seal** into the groove of the relevant waste hole in linear base moulding (pre-fitted into shower base).

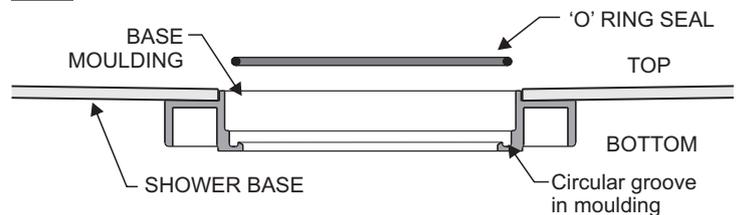


4 Insert **Threaded Connector** into the relevant waste hole.

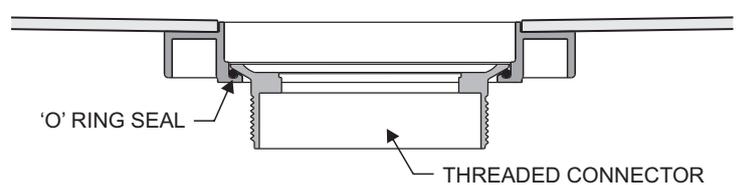

5 Fit **Spacer** onto threaded connector.

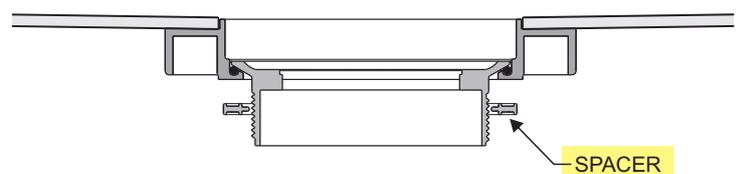

6 Screw **Rubber Sealing Bung** to the **Threaded Connector** and fully hand tighten, ensuring that the rubber seal is towards the underside of the shower base.

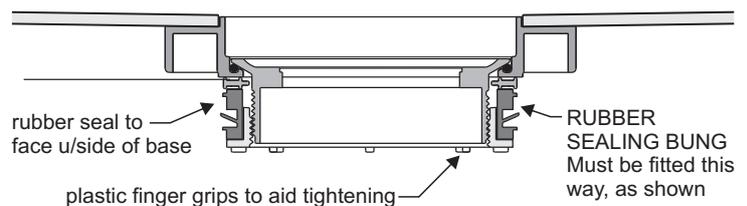

7 Fit base into Metal Tray as described in the Aqua4MA Installation Instructions. Connect **Inner Cup** to **Inner Tube** and insert into the waste.

WRLTWAS Waste Maximum Flow Rate = 37 litres/min.